



AGRI

SELECTION

25 EXCLUSIVE HIGHLIGHTS



Professional Tools for maximum Power



**STRONG
AND RELIABLE**

GEDORE TOOL ASSORTMENT FOR AGRICULTURE

Excellent work results are always dependent on smooth processes. Safe, high-quality tools are therefore essential in agriculture.

Whether standard or special applications, with the premium tool range from GEDORE you can do repairs and maintenance on machines and tools quickly and efficiently. With the right tools, you can also ensure safe, efficient operation in maintaining your fleet.

The powerful and robust hand tools from GEDORE is highly suited to the agricultural sector and will never let you down.

1504 XL-S-306 AGRAR
**WORKBENCH WITH
 PROFESSIONAL RANGE**
 306 pieces

- › Ideally suited for service and maintenance work on agricultural machinery
- › With GEDORE Check-Tool-System: completeness check by 2-colored foam inserts
- › Resistant to oils and fats
- › 30 mm thick multiplex beech wood panel, surface additionally protected with linseed oil varnish
- › Large storage space with shelf and door
- › Central locking with cylinder lock
- › Safety lock for each drawer, one-handed operation
- › Ball bearing guide rails
- › Load capacity per drawer 40 kg, lower heavy-duty drawer 60 kg
- › Even under maximum loads, the GEDORE trapezoidal axle construction ensures: smooth running, maneuverability and directional stability



Code	No.	RAL	Height mm	Width mm	Depth mm	Drawers	max. load capacity kg	pieces	Weight kg
3434834	1504 XL-S-306 AGRAR	GEDORE blue, RAL 5017	985	1,250	630	1x Typ XL, H=75mm, extra wide 7x Typ 1b, H=67mm 1x Typ 2b, H=137mm	1,000	306	182.9

Content

Rolling workbench extra wide 1504 XL 1710 | 1.25 m, Screwdriver bit set 1/4" 620-024, Square handle 1/4" 2098, Socket 20 4 4.5 5 5.5 6 7 8 9 10 11 12 13 14 mm, Screwdriver bit 1/4" IN 20 4 5 6 8 mm, Screwdriver bit ITX 20 T8 T9 T10 T15 T20 T25, Reversible ratchet 1/4" 2093 U-10, T-handle 1/4" 2087, Extension 2090-2-4-6, Cardan joint 2095, Socket 1/2" 19 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 32 33 34 36 mm, Socket 1/2" D 19 L 10 L 12 L 13 L 14 L 15 L 16 L 17 L 18 L 19 L 21 L 22 L 24 L 27 L 30 L 32 mm, Screwdriver bit 1/2" IN 19 4 5 6 7 8 9 10 12 14 17 19 mm, Screwdriver bit 1/2" IN 19 L 6-140 7-140 8-140 9-140 10-140 12-140 14-140 mm, Screwdriver bit 1/2" ITX 19 L T20-100 T25-100 T27-100 T30-100 T40-100 T45-100 T50-100 T55-100 T60-100, Socket 1/2" TX 19 E10 E11 E12 E14 E16 E18 E20 E24, Reversible ratchet 1/2" 1993 U-10 T, T-handle 1/2" 1990-3 -5 -10, Cardan joint 1/2" 1995, Impact socket 1/2" K 19 17 18 19 21 22 23 24 27 30 32, Power wrench extension 1/2" KB 1990-5, Adapter set S 2032-05, 5 pieces, Check tool inlay with assortment 2005 CT4-7 XL, Combination wrench 1 B 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 30 32 34 mm, Open-end wrench with ring ratchet 7 R 10 11 12 13 14 15 16 17 18 19 21 22 24 mm, Starter block wrench 304 13x15 14x17 19x22 mm, Double box wrench open 400 9x11 10x12 13x15 14x17 19x22 24x27, Allen key set H 42 EL-88, Offset screwdriver 42 EL 12 14, Offset screwdriver set PH 42-88, 8 pieces, Angle screwdriver 42 7 9 12 14 17 19 22 mm, 3C screwdriver, short form 2153 5.5, 3C screwdriver with impact cap 2154SK 3.5 5.5 6.5 8, 3C screwdriver short form 2161 PH 2, 3C screwdriver with impact cap 2160SK PH 1 PH 2 PH 3 PH 4, 3C screwdriver 2163 TX T10 T15 T20 T25 T30 T40, Socket wrench 2133 6 7 8 10 11 12 13 mm, Flat blunt workshop file 8701 2-10 | 10", Round workshop file 8722 2-10 | 10", Half-round workshop file 8725 2-10 | 10", Water pump pliers 142 10 TL | 10", Gedore grip pliers 137 10, Combination pliers 8210-160 JC, Power side cutter 8316-200 JC, Multiple pliers 8133-180 JC, Needle nose pliers 8132 AB-200 JC, Assembly pliers set S 8008, 8 pieces, Pliers wrench 183 10 JC | 10", Locksmith's hammer ROTBAND-PLUS 600 H-600, Locksmith's hammer ROTBAND-PLUS 600 H-1500, Soft face hammer 248 H-50, Pin punch 119-2 2 3 4 5 6 7 8 9 10, Grains 100-12, Slotted chisel 104, Cross chisel flat oval 96-175 | 175x17x11mm, Feeler gauge 702 13 M, Gasket scraper 133 K, Steel tape measure 4534-8 | 8m, Pocket vernier caliper 710, Car light test lamp 4610, Wire brush 644, Mounting lever 39, Solid 906 foam kneeboard, Magnetic lifter 640-1800

XL WORKBENCH WITH TOOLS FOR AGRICULTURAL MACHINERY

A 198-piece tool assortment especially for agricultural machinery, housed in an XL workbench. All tools for service and maintenance work on tractors, combine harvesters & co. are perfectly organised, safely stored and ready for immediate use.

The **GEDORE 1504 XL-S-198 rolling workbench** is a mobile workstation in a class of its own, equipped with a 198-piece assortment specially tailored for agricultural machinery technicians. In addition to 1/4" and 1/2" socket sets, the range also includes pliers, screwdrivers, impact tools and much more. All housed in clear foam modules for maximum organization. Four drawers with a load capacity of 40 kg each are neatly loaded with tools in high-density foam inserts. Three additional drawers as well as a heavy-duty drawer with 60 kg load capacity can be used according to individual requirements. For a better overview and easy access to the tools, all 7 drawers have full extension when opening - unbeatable with 1 tonne total load capacity. In terms of load capacity, the 1504 XL offers maximum stability thanks to its torsion-resistant sheet steel construction.

Even with a 750kg load, the workbench is easy to manoeuvre



Even more tools? An even wider range and a total of 9 drawers is offered by the **agrar Workbench 1504 XL-S-306 from GEDORE with 306-piece professional assortment.** (See p.3)

Agar workbench with basic assortment 1504 XL-S-198 AGRAR

1

WORKBENCH WITH 1 TON LOAD CAPACITY

- Wide drawers, large storage space and 1,000 kg load capacity for heavy and large tools

2

CUSTOMISABLE AND FLEXIBLE

- Expandable with back panel, additional tools and sets in foam inserts

3

TOOLS FOR AGRICULTURAL MACHINERY

- Tool selection especially for service and maintenance work on agricultural machinery

4

EXTENSIVE PREMIUM EQUIPMENT


- Socket sets in 1/4" and 1/2", pliers, screwdrivers, impact tools and much more

„The workbench offers maximum flexibility and the assortment is perfectly matched to my daily needs, I filled the 3 empty drawers with the tools I already had. Now everything finally has its place.“

1504 XL-S-198 AGRAR WORKBENCH WITH BASIC SET

198 pieces

- > Ideally suited for service and maintenance work on agricultural machinery
- > With GEDORE Check-Tool-System: completeness check by 2-colored foam inserts
- > Resistant to oils and fats
- > 30 mm thick multiplex beech wood panel, surface additionally protected with linseed oil varnish
- > Large storage space with shelf and door
- > Central locking with cylinder lock
- > Safety lock for each drawer, one-handed operation
- > Ball bearing guide rails
- > Load capacity per drawer 40 kg, lower heavy-duty drawer 60 kg
- > Even under maximum loads, the GEDORE trapezoidal axle construction ensures: smooth running, maneuverability and directional stability

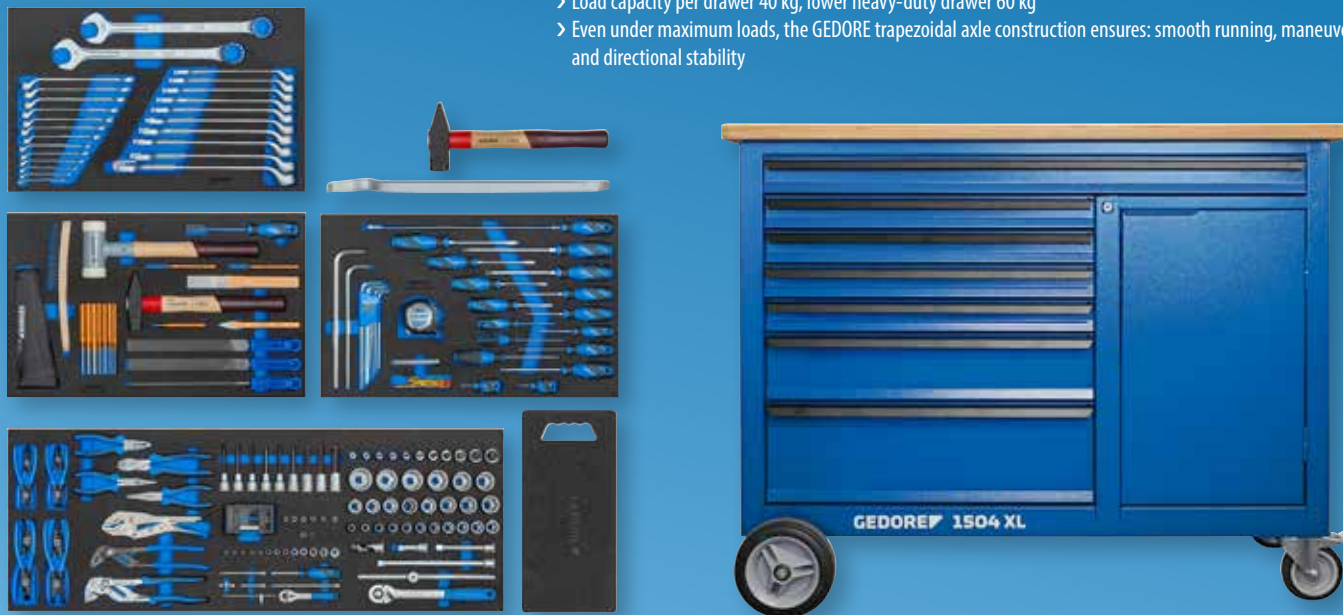

Code	No.	RAL	Height mm	Width mm	Depth mm	Drawers	max. load capacity kg	pieces	Weight kg
3434826	1504 XL-S-198 AGRAR	GEDORE blue, RAL 5017	985	1,250	630	1x Typ XL, H=75mm, extra wide 4x Typ 1b, H=67mm 1x Typ 2b, H=137mm 1x Typ 3b, H=207mm	1,000	198	157.4

Content

Mobile workbench 1504 XL 1411 1.25 m wide, Screwdriver bit set 1/4" 620-024, Square handle 1/4" 2098, Socket 20 4.5 5.5 6.7 8 9 10 11 12 13 14 mm, Screwdriver bit 1/4" IN 20 4.5 6 8 mm, Screwdriver bit ITX 20 T8 T9 T10 T15 T20 T25, Reversible ratchet 1/4" 2093 U-10, T-handle 1/4" 2087, Extensions 2090-2-4-6, Cardan joint 2095, Socket 1/2" 19 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 32 33 34 36 mm, Screwdriver socket 1/2" IN 19 4.5 6 7 8 9 10 12 14 17 19, Screwdriver bit 1/2" ITX 19 L T20-100 T25-100 T27-100 T30-100 T40-100 T45-100 T50-100 T55-100 T60-100, Reversible ratchet 1/2" 1993 U-10 T, T-handle 1/2" 1987, Extensions 1/2" 1990-3-5-10, Cardan joint 1/2" 1995, Combination wrench 1 B 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 30 32 34 mm, Allen key set H 42 EL-88, Offset screwdriver 42 EL 12 14, 3C screwdriver, short form 2153 5.5, 3C screwdriver with impact cap 2154SK 3.5 5.5 6.5 8, 3C screwdriver short form 2161 PH 2, 3C screwdriver with impact cap 2160SK PH 1 PH 2 PH 3 PH 4, 3C screwdriver 2163 TX T10 T15 T20 T25 T30 T40, Flat butt workshop file 10" 8701 2-10 | 250x25mm, Round workshop file 10" 8722 2-10 | 250x10 mm, Half-round workshop file 10" 8725 2-10 | 250x25 mm, Water pump pliers 10" 142 10 tsp, Gedore grip pliers 137 10, Combination pliers 8210-160 JC, Power side cutter 8316-200 JC, Multiple pliers 8133-180 JC, Needle nose pliers 8132 AB-200 JC, Assembly pliers set S 8008, 8 pcs, Pliers wrench 10" 183 10 JC, Locksmith's hammer ROTBAND-PLUS 600 H-600 S, Locksmith's hammer ROTBAND-PLUS 600 H-1500, Soft face hammer 248 H-50, Pin Punch 119-2.2 3 4 5 6 7 8 9 10mm, Grains 100-12, Slotted chisel 104, Cross chisel flat oval 96-175 | 175x17x11mm, Feeler gauge 702 13 M, Gasket scraper 133 K, Steel tape measure 4534-8 | 8m, Pocket vernier caliper 710, Car light test lamp 4610, Wire brush 644, Mounting lever 39, Solid 906 foam kneeboard, Magnetic lifter 640-1800

KL-1029-20 A WHEEL BREAKER

6 pieces



- > With the powerful 17-ton press, stuck wheels can be pressed off the wheel hub quickly and easily
- > Due to the compact design, various straightening work on body parts can be carried out professionally and precisely in tight spaces
- > The press can be variably adjusted in length from 120 to 250 mm by using the pressure pads and extensions as well as by fine adjustment of the thread
- > Additional safety is provided by the safety retaining belt available as an accessory

Code	No.	Content	Drive type	Load kg	pieces	Weight kg
3412865	KL-1029-20 A	1x KL-0040-1700 Hydr. Cyl. 17t short, 1x KL-1029-2001 extension with O-ring, 2x KL-1029-2002 pressure piece with thread, 1x KL-1029-2003 - Extension with thread, 1x KL-1029-2004 pressure piece with O-ring	hydraulic	17,000	6	4.6

KL-0165-3 KA BALL JOINT EXTRACTOR SET

6 pieces



- › For loosening ball joint connections on axle and steering systems
- › Variable thanks to interchangeable forks
- › Ideal release pressure point and push-off angle adjustable

Code	No.	Content	Length mm	Width mm	Depth mm	pieces	Weight kg
2801817	KL-0165-3 KA	1x KL-0165-300 basic tool without fork 1x KL-0165-3001 fork size 3 - a=30 mm - e=80 mm - d=200 mm (results in KL-0165-30) 1x KL-0165-3101 fork size 3 - a=34 mm - e=80 mm - d=200 mm (results in KL-0165-31) 1x KL-0165-3201 fork size 3 - a=40 mm - e=80 mm - d=200 mm (results in KL-0165-32) 1x KL-0165-3301 fork size 3 - a=42 mm - e=80 mm - d=200 mm (results in KL-0165-33) 1x KL-0165-3401 fork size 3 - a=47 mm - e=80 mm - d=200 mm (results in KL-0165-34) 1x KL-0165-3501 fork size 3 - a=33 mm - e=80 mm - d=200 mm (results in KL-0165-35) 1x KL-0165-3090 A Plastic Case	230	450	360	6	15.5

KL-1039-111 PRESS FRAME SET COMMERCIAL VEHICLE 28 T

12 pieces



- › The large and solid commercial vehicle press frame enables the pressing out and pressing in of a wide variety of bushes, bearings or bolts directly on the vehicle
- › The mounting foot also allows the mobile commercial vehicle press frame to be parked, e.g. on a workbench, as well as stationary use as a light standing press for on the go
- › The NFZ press frame can also be quickly adjusted in length and width via the extension rods and the holes in the base plates

Code	No.	Content	Drive type	pieces	Weight kg
3275299	KL-1039-111	1x KL-1039-1101 - base plate 2 $\frac{3}{4}$ "-16 UN 1x KL-1005-1011 - base plate 2 $\frac{3}{4}$ "-16 UN 2x KL-1039-1102 pull rod M22 4x KL-1005-1014 SK collar nut M22 1x KL-1039-1105 adapter 2 $\frac{3}{4}$ "-16 UNS to \varnothing 30 mm 2x KL-1039-1103 pull rod M22 extension 1x KL-1039-1106 M24 pressure nut extension 1x KL-1039-1107 mounting foot 1x KL-1039-7110 long pressure/support sleeve, \varnothing 110/102 mm 1x KL-0039-1790 Pressure/Support sleeve, long, \varnothing 90/82 mm 1x KL-0039-1770 Pressure/Support sleeve, long, \varnothing 70/62 mm 1x KL-0039-1750 Pressure/Support sleeve, long, \varnothing 50/42 mm 1x KL-0039-1740 Pressure/Support sleeve, long, \varnothing 40/32 mm 1x KL-0039-1730 Pressure/Support sleeve, long, \varnothing 30/22 mm	mechanical hydraulic	12	49

KL-0186-95 K INJECTOR EXTRACTOR UNIVERSAL

12 pieces




- › For quick and professional extraction of stuck injectors
- › It is not necessary to open the injector, as the injector extractor is attached via the fuel connection using the special screws included in the set
- › The special design of the adapter ensures damage-free and straight power transmission to the injector

Code	No.	Content	Length mm	Width mm	Depth mm	pieces	Weight kg
3296873	KL-0186-95 K	1x KL-0186-951 LDG Injector Extractor HATZ H-series 1x KL-0186-952 LDG injector puller VM-engine 1x KL-0186-9000-1 Nozzle extractor head plate 2x KL-0186-9000-2 cylinder screw M8x35 mm 1x KL-0186-9090 Plastic Case	255	72	210	12	1.9

KL-1005-111 WHEEL HUB PULLER, COMMERCIAL VEHICLE

15 pieces

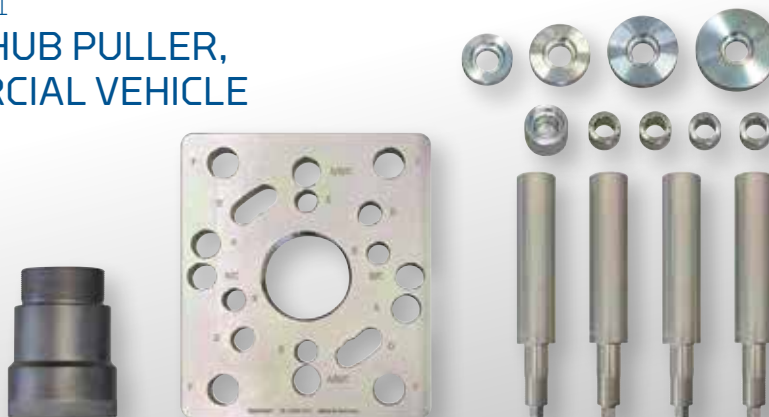

- › The wheel hub puller enables wheel hub/bearing units with removable hub caps to be removed quickly and professionally
- › The special adapter plate offers universal adaptation to a large number of bolt circles available on the market
- › With the 28 t hydraulic cylinder, which is available as an accessory, even heavily stuck wheel hubs can be removed quickly and easily

Code	No.	Content	Drive type	Load kg	pieces	Weight kg
3257258	KL-1005-111	1x KL-1005-1111 adapter plate, 1x KL-1005-1112 - Extension 2-3/4" 4x KL-1005-1113 adapter spindle low loader M22x1.5 4x KL-1005-1114 intermediate sleeve, 1x KL-1005-1115 Pressure washer, short 1x KL-1005-1116 - Pressure washer Ø 48 mm, 1x KL-1005-1117 - Pressure washer Ø 58 mm 1x KL-1005-1118 - Pressure washer Ø 68 mm, 1x KL-1005-1119 - Pressure washer Ø 78 mm	hydraulic	28,000	15	17.5

KL-4007-411 SWIVEL HANDLE 3/4"

- › Extra long version with 180° joint
- › Suitable for extremely tight screws



Code	No.	Drive square	Total swing angle	Load (max.) Nm	Length mm	Weight kg
2941554	KL-4007-411	3/4"	180°	1,050	980	3.5

THE ORIGINAL - THE GEDORE DREMOMETER MADE FROM ALUMINIUM

The controlled tightening of screws to ensure safety or compliance with standards and regulations.

The **GEDORE DREMOMETER 8581-01** ensures controlled and safe screw tightening from 600 to 1,500 Nm in every assembly situation, with an accuracy of $\pm 3\%$ of the set scale value. It exceeds the standard of $\pm 4\%$ specified by DIN EN ISO 6789:2017.

From agriculture, aviation or a vast array of machinery

- with the DREMOMETER, the force can be precisely transferred to the screwdriving application. The user is flexible in the gripping position, depending on the application, and the exact transmission of force is ensured at all times, regardless of the hand position. Even when working with both hands with the aluminium extension tube, the set torque is always achieved exactly.



Torque Wrench DREMOMETER 8581-01

1

LONG LIFETIME

- Highest processing quality and best materials ensure an extremely long service life

2

SAFE AND CONTROLLED TIGHTENING FROM 600 TO 1,500 NM

- Safe and controlled tightening of screws and nuts with defined tightening torque

3

WORKING INDEPENDENT OF LENGTH

- Error-free operation even with extension or shifted handle position

4

HIGH TORQUES, MAXIMUM COMFORT

- Safe and easy work thanks to well thought-out design and high-quality aluminium



„Often copied, never equalled: with the legendary Alu-DREMOMETER, the first automatically releasing torque spanner with a light alloy/aluminium housing, GEDORE has been setting benchmarks and standards in the field of mechanical torque spanners in terms of accuracy, precision and robustness for decades.“

8581-01
**TORQUE WRENCH
 DREMOMETER**
 600-1,500 Nm

- > For controlled screw tightening in the range of 600 - 1,500 Nm
- > Highest accuracy max. deviation of $\pm 3\%$
- > Automatic short-path actuation with tactile impulse and audible signal
- > Single scale with a scale division of 25 Nm
- > Error-free operation - no value shift when actuated outside the handle
- > Certificate according to DIN EN ISO 6789:2017 part 2
- > Energy-saving due to the use of an extension tube



Code	No.	Type	Drive-square inch	Drive-square metric mm	Content	Nm	Height mm	Distance housing - square centre mm	Length mm	Head width mm	Head height mm	Weight kg
2311267	8581-01	Single-square	1"	25	Extension tube No. 8564-92	600-1,500	71	30	932	60,0	40	10.8

8563-10
**TORQUE WRENCH
 DREMOMETER**
 155-760 Nm / 115-560 lbf·ft

- > For controlled clockwise tightening in the range of 155 - 760 Nm / 115 - 560 lbf·ft
- > Highest accuracy max. deviation of $\pm 3\%$
- > Automatic short-path actuation with tactile impulse and audible signal
- > Double scale with a scale division of 10 Nm and 10 lbf·ft
- > Error-free operation - no value shift when actuated outside the handle
- > Certificate according to DIN EN ISO 6789:2017 part 2



Code	No.	Type	Drive-square inch	Drive-square metric mm	Nm	Height mm	Distance housing - square centre mm	Length mm	Head width mm	Head height mm	Weight kg
7691500	8563-10	Single-square	3/4"	20	155-760	60	22.5	812	45	35	3.45

SAFE HANDLING



32 EMU-2 SOCKET SET 3/4"

14 pieces



- › For loosening and tightening screws and nuts with large wrench sizes
- › Ideal for robust use in daily stationary or mobile use around the commercial vehicle workshop or industry
- › Sockets with screw-protecting hexagonal profile
- › Durable, long-life GEDORE blue sheet steel case

20 3/4"  mm 

Code	No.	Content	Width mm	Height mm	Depth mm	pieces	Weight kg
6280340	32 EMU-2	Ratchet 3293 U-2, Inserts 32 22 24 27 30 32 36 38 41 46 50 Accessories cross handle with sliding piece 3287, 3/4" extension 3290-8-16	525	73	203	14	11.6

D 19 VMU-10 SOCKET SET 1/2"

28 pieces



- › With hand-operated 12-corner UD-profile sockets
- › With actuation tools
- › With robust lever-operated ratchet, with push button release
- › In GEDORE blue sheet steel case


12,5 1/2"  mm 

Code	No.	Content	Length mm	Width mm	Height mm	Depth mm	pieces	Weight kg
2682877	D 19 VMU-10	Ratchet 1993 U-10T Inserts D 19 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 26 27 28 30 32 33 34 36 Accessories cross handle with sliding block 1987 Extension 1990-5-10, Cardan joint 1995	277	425	55	277	28	6.7

D 20 TMU-10
SOCKET SET 1/4"
 39 pieces



- › With forged, tempered hexagon UD profile sockets, hand-operated
- › With robust lever-change reversible ratchet
- › In plastic case



Code	No.	Content	Length mm	Width mm	Height mm	Depth mm	pieces	Weight kg
1815660	D 20 TMU-10	Ratchet 2093 U-10, Inserts D 20 4 5 6 7 8 9 10 11 12 13, 680 4 6.5, 685 3 4 5 6 8, 685 X 5 6 8, 687 TX T10 T15 T20 T25 T27 T30 T40, 690 1 2, 690 PZD 1 2 3, Accessories, 620, 639 673 6.3, Multi-handle 676, 699, 1/4" extension 2090-4, Cardan joint 2095	202	123	39	120	39	0.767

3296
SWIVEL HANDLE 3/4"



- › For hand-operated sockets and accessories with square drive as per DIN 3120, ISO 1174 with locking pin

Code	No.	Drive square	Drive square mm	Length mm	Weight kg
6279250	3296	3/4"	20	547	1.965

7 XL
COMBINATION SPANNER
 extra long



- › Extra long shaft for deep range of use and more torque
- › Slim jaw and jaw walls make this spanner lighter overall
- › Ring angled 15°, with UD profile - for gentle force transmission
- › Jaw position 15°, precisely ground to exact nominal dimension for optimum contact surfaces



Code	No.	Spanner size mm	Length mm	Weight kg	Code	No.	Spanner size mm	Length mm	Weight kg
1394916	7 XL 7	7	160	0,031	6080410	7 XL 21	21	338	0,352
6080090	7 XL 8	8	170	0,042	6101190	7 XL 22	22	348	0,392
6080170	7 XL 9	9	180	0,054	6101270	7 XL 24	24	400	0,521
6097300	7 XL 10	10	190	0,06	6101350	7 XL 27	27	450	0,711
6097490	7 XL 11	11	200	0,076	6101780	7 XL 30	30	478	0,839
6100540	7 XL 12	12	210	0,086	6101430	7 XL 32	32	480	0,956
6100620	7 XL 13	13	225	0,102	6101940	7 XL 34	34	520	1,088
6100700	7 XL 14	14	225	0,12	6101510	7 XL 36	36	550	1,248
6100890	7 XL 15	15	250	0,147	6102080	7 XL 41	41	600	2
6080250	7 XL 16	16	265	0,171	6102160	7 XL 46	46	640	2,278
6100970	7 XL 17	17	280	0,196					
6080330	7 XL 18	18	295	0,233					
6101000	7 XL 19	19	310	0,276					

UNIVERSAL COMBINATION SPANNER

Reliable companion for the most common screw connections.

The **combination spanner 1 B** from **GEDORE** combines an open-end spanner and a box spanner in one tool. Thanks to the wave-shaped ring recess, the unit-drive profile (UD) ensures precise and even force transmission protecting the screw head. Stripping of the screw is prevented. The torsion-resistant design of the spanners ensures maximum torque transmission. In addition, the stable design of the spanner body can

be extended, e.g. with the spanner extension KL-4007-500. The flat angle of the ring head is perfectly suited to tight working spaces.



Combination spanner 1 B

1

GENTLE POWER TRANSMISSION (UD PROFILE)

- GEDORE Unit Drive Profile (UD) is gentle on the screw head and optimises power transmission

2

FOR TIGHT SPACES

- Optimum use of space thanks to angled and cranked ring

3

VARIABLE IN THE APPLICATION

- Maximum flexibility thanks to stable shaping of the key body



„Thanks to the UD profile the ring head protects the screw heads even with large force transmission.“

1 B COMBINATION SPANNER WITH SAME SIZE EACH END

metric



- > Size 5 and 5.5 mm with hexagonal ring, from 6 mm with UD profile for gentle power transmission
- > Ring: cranked and 10° angled
- > For actuating recessed or deep-set nuts or screws

* not standardised

Code	No.	Spanner size mm	Length mm	Weight kg	Code	No.	Spanner size mm	Length mm	Weight kg
6000240	1 B 5	5	101	0.015	6002450	1 B 25	25	328	0.431
6000320	1 B 5.5	5.5	101	0.015	6002530*	1 B 26	26	340	0.481
6000400	1 B 6	6	101	0.016	6002610	1 B 27	27	350	0.514
6000590	1 B 7	7	111	0.028	6002880*	1 B 28	28	370	0.578
6000670	1 B 8	8	128	0.026	6002960*	1 B 29	29	370	0.546
6000750	1 B 9	9	141	0.035	6003180	1 B 30	30	390	0.672
6000830	1 B 10	10	149	0.042	6003260	1 B 32	32	410	0.684
6000910	1 B 11	11	158	0.05	6003340*	1 B 33	33	410	0.827
6001050	1 B 12	12	168	0.064	6004150	1 B 34	34	405	0.784
6001130	1 B 13	13	185	0.08	6003420	1 B 36	36	460	1.147
6001210	1 B 14	14	200	0.091	6003500*	1 B 38	38	460	1.081
6001480	1 B 15	15	211	0.139	6003690	1 B 41	41	520	1.452
6001560	1 B 16	16	220	0.128	6003770	1 B 46	46	550	1.893
6001640	1 B 17	17	232	0.153	6003850	1 B 50	50	575	2.268
6001720	1 B 18	18	245	0.183	6003930	1 B 55	55	620	2.9
6001800	1 B 19	19	257	0.21	6004070	1 B 60	60	650	3.6
6001990*	1 B 20	20	270	0.245	6004660*	1 B 65	65	705	4.415
6002020	1 B 21	21	280	0.281	6004740*	1 B 70	70	755	5.625
6002100	1 B 22	22	291	0.294	6004820*	1 B 75	75	810	6.545
6002290*	1 B 23	23	305	0.35	6004900*	1 B 80	80	860	8.79
6002370	1 B 24	24	320	0.372					

400 DOUBLE ENDED RING SPANNER

open



- > Application on hydraulic/ brake lines
- > Sizes 8x10 to 12x14 mm with hexagon
- > Heads 15° angled
- > Hexagonal opening 30° offset, UD profile opening 15° offset



Code	No.	Spanner size mm	Length mm	Weight kg	Code	No.	Spanner size mm	Length mm	Weight kg
6057190	400 8X10	8x10	140	0,045	6057780	400 17X19	17x19	215	0,179
6056970	400 9X11	9x11	145	0,059	6058670	400 19X22	19x22	232	0,246
6057270	400 10X11	10x11	150	0,064	6057860	400 22X24	22x24	250	0,335
6051070	400 10X12	10x12	152	0,073	6058750	400 24X27	24x27	270	0,408
6057350	400 11X13	11x13	160	0,077	6058830	400 30X32	30x32	300	0,575
6057430	400 12X14	12x14	170	0,106	1933175	400 36X41	36x41	345	0,98
6057000	400 13X15	13x15	180	0,116	2297183	400 46X50	46x50	395	0,8
6057510	400 14X17	14x17	195	0,136					

600 H-1500
ENGINEER'S HAMMER
ROTBAND-PLUS -
THE ORIGINAL

- › For universal use in the workshop, on the construction site, in the industrial sector or at home
- › Locksmith's hammer with proven safety technology
- › Hardened hammer head and hardened handle protection sleeve ROTBAND-Plus made of steel



Code	No.	Head weight g	Handle length mm	Length mm	Weight kg
8583740	600 H-1500	1,500	380	385	1.908

SK 2154 PH-06
3C-SCREWDRIVER SET
WITH STRIKING CAP

6 pieces

- › For firmly seated slotted and cross-head screws PH
- › Hexagon blade with additional hexagon bolster
- › Ergonomic 3-component handle Power-Grip³ for maximum power with minimum effort
- › With hanging hole on the handle for space-saving storage



Code	No.	Content	pieces	Weight kg
1878743	SK 2154 PH-06	Screwdriver with striking cap slot No. 2154SK, 4.5 5.5 6.5 8 mm Screwdriver with striking cap Phillips No. 2160SK PH, 1.2 mm	6	0.88

H 42 KEL-88
HEXAGON
SOCKET KEY SET

for hexagon socket screws, extra long, with ball head, 8 pieces

- › For loosening and tightening hexagon socket screws
- › Ball head enables screwing in places that are difficult to access



Code	No.	Content	Length mm	Width mm	Height mm	pieces	Weight kg
1523988	H 42 KEL-88	42 KEL 2.2.5 3 4 5 6 8 10	230	75	23	8	0.415

5 8100 SET OF CIRCLIP PLIERS

4 pieces



- > For internal and external retaining rings
- > With straight jaws



Code	No.	Content	Length mm	Width mm	Height mm	pieces	Weight kg
6703080	5 8100	8000 A 1 2, 8000 J 1 2	315	156	30	4	0.597

119 L PIN PUNCH SET

6 pieces



- > Striking heads inductively tempered
- > In PVC holder

Code	No.	Content	Length mm	Width mm	Height mm	pieces	Weight kg
8866290	119 L	119-175-4 175-5 175-6 175-7 175-8 175-10	180	75	16	6	0.58

137-600 BENDING BAR OCTAGONAL



- > Carefully hardened and tempered along the full length



Code	No.	Total length mm	Tip length mm	Tip Ø mm	Shaft-Ø mm	Weight kg
8783590	137-600	600	120	5	20	1.305

176 1.1/2 ELBOW PIPE WRENCH ECK-SCHWEDE®



- > Perfect for work in confined spaces
- > With narrow head, multi-grip jaw pattern, angled 52°
- > Self-gripping by teeth offset against direction of rotation
- > Roller secured against loss

Code	No.	Size	Tube-Ø mm	Length mm	Weight kg
6438230	176 1.1/2	1.1/2	62	430	1.405

1.07/K-2
PULLER-SET
 with 9 hooks, 13 pieces

- › 2. spindle in case 1.07/K saves working time
- › In robust plastic case



RESISTANCE
 FUTILE

Code	No.	Content	Max. Clamping depth usable mm	Max. Span mm	Hook base thickness mm	pieces	Weight kg
1676008	1.07/K-2	107/2A03 Cross beam 3-arm 260 mm 106/2A03 Traverse 2-arm 260 mm 106/B-150-S Pull-off hook slim 150 mm (3x) 106/S220 Pull-off hook slim 220 mm (3x) 106/B-300-S Pull-off hook slim 300 mm (3x) 1.2106210 Spindle 22, G 1/2", 210 mm (2x) 107/399 Plastic case with foam inlay for 1.07/K-2	150 / 220 / 300	200	5	13	13.5

1.04/STHP-B
PULLER-SET
 with stand, 3 pieces



- › Cross-beam especially hardened and tempered allows safe application of extremely high pulling forces and doubles the tensile force capability
- › With leg brake - prevents unintentional leg slipping. The leg can be slid along the cross-beam at the push of a button
- › Can be used as external and internal puller by repositioning the hooks
- › Scale for uniform adjustment of the puller legs. Allows centred pulling, with optimised application of force, even when extremely high pulling forces are required

Code	No.	Content	Length mm	pieces	Weight kg
2300044	1.04/ST-HP-B	1.04/HP1A-B Puller HIGH POWER 2-arm 130x100 mm 1.04/HP2A-B Puller HIGH POWER 2-armed 200x150 mm 1.04/HP3A-B Puller HIGH POWER 2-armed 350x200 mm 1.04/97 Stand empty for 1.04 series	125	3	14.4