

Tapping capacity in Steel

Adjustable speed 40-450 rpm

Torque max. 39 Nm

Spindle Ø 19 mm (GR1)



Multi-directional Head

Magent positioning for rapid alignment of the spindle.



## **ACCESORIES**



Quick change bush with or without safety clutch M2-M16 GR1

Die-holder for external threads



Work-table with T-slot  $800 \times 600 \text{ mm H} = 830 \text{ mm}$ 


Thickness of the working plane 30

Weight 150Kg

## MACHINE CHARACTERISTICS

- Articulated balanced arm made entirely of special aluminum, which guarantee hight stability and a precise holes alignment.
  - Electric Brushless Motor 400 W (220 V) complete integrated in the arm, with hight performance, minimum noise and low electricity consumption.
- Large range of adjustment of tapping speed without the use of additional modules
  - Maximum reverse speed for the extraction of the tool
    - Articulated arm with adjustable balance
- Possibility to tap also blind hole with the quick change holders with safety and adjstable clutch to prevent tap breakage.

## **WORKING AREA**

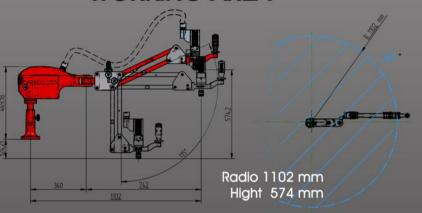



Volumec - Via Del Mercato 5 31020 Sernaglia della Battaglia (TV) - ITALY Phone +39 0438 900299 - Fax +39 0438 189651 ww.volumec.it - info@volumec.it



Bush with chuck adapter (1-13 mm) for drilling, countersinking, screwing



Trolley with wheels and brake 850 x 750 mm H= 870mm

Weight: 65 kg



Cesta na Brdo 85, 1000 Ljubljana tel:+386 1 256 10 56, fax:+386 1 256 10 55 mailto:info@energe.si, http://www.energe.si